



Customer Responsibility

Discount Structures is not responsible for site preparation. Please have your site level before we arrive. Your building is delivered by truck and trailer. Clearance requirements needed for delivery:

8' Wide Building

- 12' height clearance. No tree limbs, wires, etc.
- 10' width clearance. For Garden, Quaker and Carriage Bldgs, add 1 foot.

10' Wide Building

- 12' height clearance. No tree limbs, wires, etc.
- 12' width clearance. For Garden, Quaker and Carriage Bldgs, add 1 foot.

12' Wide Building

- 14' height clearance. No tree limbs, wires, etc.
- 14' width clearance. For Garden, Quaker and Carriage Bldgs, add 1 foot.


Site Preparation

We recommend a level surface for your building. The easiest way to acquire a level surface is to use crushed (3/4" clean), approximately 2 to 3 inches deep.

The following is an example of preparation procedures for an 8 x 12 Barn:

Drive a stake into the ground at a front corner of building site. Measure 9 feet to opposite front corner and drive stake into the ground. This would be the front (doorside) of your building. Now, place rear stakes 13 feet from the front corner stakes. To check your work, measure the diagonals in both directions. Measurements **A** and **B** must be equal.

If your ground is unlevel, find the highest ground and measure up 3" from base of stake (ground) and mark stake. Take a string and string level and attach string to 3" mark with a nail. Stretch out string and when string level is level, attach string to post. Now fill this area with crushed stone to the height of string lines. Repeat this step until entire site is level.

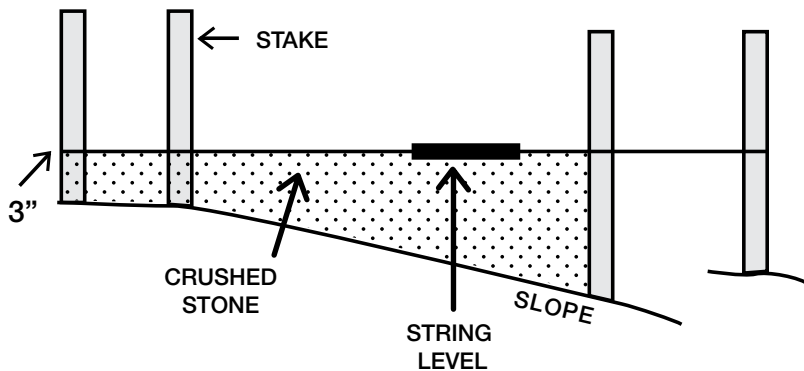

NOTE: NO PIER FOUNDATIONS ALLOWED

